



Heat Build-Up Information | Kemlite® ETR Translucent Roof Panel

Composite translucent roofs have been in use since 1990. Heat build-up can be a concern for fleets that transport products that are sensitive to heat.

Crane Composites documented heat build-up in trailers with five different roof materials. XTRA Lease assisted in the testing of these products. Crane tested five trailers, each with a different roof panel material at the XTRA Lease facility in Phoenix, Arizona.

Testing:

The tests were conducted over a four day period. Continuous temperature and relative humidity readings were obtained by using three data loggers (DL), each positioned 16' from the nose of the trailers. The average daily temperature reached a maximum of 64° in the shade and 86° in the sun. The trailers were positioned appropriately 6' apart from one another with rear doors facing south. The roof specification on each trailer was as follows:

Product:

Kemlite ETR 10% Light Transmission, 0.075" Thick
Aluminum Roof, 0.040" Thick
Aged Aluminum Roof, 0.040" Thick

Date of Manufacture:

11/2007
11/2007
02/1996

Results			
Roof Description	Maximum Temperature Interior Roof Surface	Maximum Temperature Inside Trailer 2' from Ceiling	Maximum Temperature Inside Trailer 6' from Ceiling
10% Light Transmission ETR Roof Panel	76.7°	74.4°	71.8°
Aluminum Roof	88.4°	74.6°	71.1°
Aged Aluminum Roof	99.5°	73.3°	70.0°


Summary:

- The 10% ETR roof panel generated an equal interior temperature as the aluminum roof.
- The 10% ETR roof panels allow better visibility in the trailer compared to the aluminum roof.
- Aluminum roofs generate the highest allowed surface temperature.

10% Light Transmission ETR



Aluminum Roof

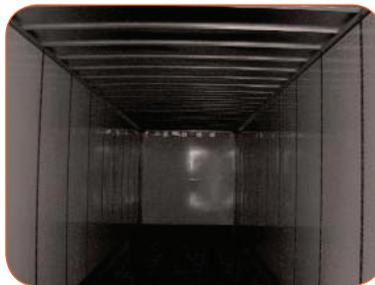

Aged Aluminum Roof

