


2.67 x 1/2 RIB

PROFILE #: 010

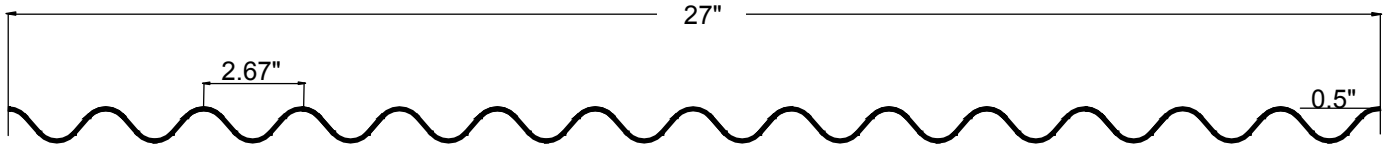

### 010FR | 8oz. Fire-Rated

TABLES BELOW IN FEET AND INCHES ONLY

<b>ROOFING: POSITIVE LOADS</b>		LIMITING CRITERIA: 2.5 to 1 Safety Factor		45 to 1 Deflection Limit Ratio (L/D)											
Panel Description: 2-1/2 x 1/2		Panel Strength = 150000 psi		Flexural Modulus = 1000000 psi											
Fire Rated (Class A)															
8 oz./sq. ft.															
Generic: 10FR	20 psf			30 psf			40 psf			50 psf			60 psf		
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit	4'-0"	4'-0"	4'-6"	3'-4"	3'-4"	3'-8"	2'-10"	2'-10"	3'-2"	2'-7"	2'-7"	2'-10"	2'-4"	2'-4"	2'-7"
Deflection Limit	2'-4"	3'-2"	2'-11"	2'-1"	2'-9"	2'-7"	1'-11"	2'-6"	2'-4"	1'-9"	2'-4"	2'-2"	1'-8"	2'-2"	2'-0"

<b>ROOFING/SIDING: WIND LOADS</b>		LIMITING CRITERIA: 1.88 to 1 Safety Factor		20 to 1 Deflection Limit Ratio (L/D)											
Panel Description: 2-1/2 x 1/2		Panel Strength = 150000 psi		Flexural Modulus = 1000000 psi											
Fire Rated (Class A)															
8 oz./sq. ft.															
Generic: 10FR	20 psf			30 psf			40 psf			50 psf			60 psf		
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit	4'-8"	4'-8"	5'-2"	3'-10"	3'-10"	4'-3"	3'-3"	3'-3"	3'-8"	2'-11"	2'-11"	3'-3"	2'-8"	2'-8"	3'-0"
Deflection Limit	3'-1"	4'-2"	3'-10"	2'-9"	3'-8"	3'-4"	2'-6"	3'-4"	3'-1"	2'-3"	3'-1"	2'-10"	2'-2"	2'-11"	2'-8"

### 010GP | 4oz. General Purpose

TABLES BELOW IN FEET AND INCHES ONLY

<b>ROOFING: POSITIVE LOADS</b>		LIMITING CRITERIA: 2.5 to 1 Safety Factor		45 to 1 Deflection Limit Ratio (L/D)											
Panel Description: 2-1/2 x 1/2		Panel Strength = 150000 psi		Flexural Modulus = 1000000 psi											
General Purpose															
4 oz./sq. ft.															
Generic: 10GP	20 psf			30 psf			40 psf			50 psf			60 psf		
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit	3'-1"	3'-1"	3'-5"	2'-6"	2'-6"	2'-9"	2'-2"	2'-2"	2'-5"	1'-11"	1'-11"	2'-2"	1'-9"	1'-9"	2'-0"
Deflection Limit	1'-11"	2'-7"	2'-5"	1'-8"	2'-3"	2'-1"	1'-6"	2'-1"	1'-11"	1'-5"	1'-11"	1'-9"	1'-4"	1'-10"	1'-8"

<b>ROOFING/SIDING: WIND LOADS</b>		LIMITING CRITERIA: 1.88 to 1 Safety Factor		20 to 1 Deflection Limit Ratio (L/D)											
Panel Description: 2-1/2 x 1/2		Panel Strength = 150000 psi		Flexural Modulus = 1000000 psi											
General Purpose															
4 oz./sq. ft.															
Generic: 10GP	20 psf			30 psf			40 psf			50 psf			60 psf		
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit	3'-6"	3'-6"	3'-11"	2'-10"	2'-10"	3'-3"	2'-6"	2'-6"	2'-9"	2'-3"	2'-3"	2'-6"	2'-0"	2'-0"	2'-3"
Deflection Limit	2'-7"	3'-5"	3'-2"	2'-3"	3'-0"	2'-9"	2'-0"	2'-8"	2'-6"	1'-10"	2'-6"	2'-4"	1'-9"	2'-4"	2'-2"

010GP | 5oz. General Purpose

TABLES BELOW IN FEET AND INCHES ONLY

<b>ROOFING: POSITIVE LOADS</b>		LIMITING CRITERIA: 2.5 to 1 Safety Factor						45 to 1 Deflection Limit Ratio (L/D)								
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi						Flexural Modulus = 1000000 psi								
General Purpose		20 psf			30 psf			40 psf			50 psf			60 psf		
5 oz./sq. ft.		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Generic: 10GP		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit		3'-5"	3'-5"	3'-10"	2'-9"	2'-9"	3'-1"	2'-5"	2'-5"	2'-8"	2'-2"	2'-2"	2'-5"	1'-11"	1'-11"	2'-2"
Deflection Limit		2'-1"	2'-10"	2'-7"	1'-10"	2'-5"	2'-3"	1'-8"	2'-3"	2'-1"	1'-6"	2'-1"	1'-11"	1'-5"	1'-11"	1'-9"

<b>ROOFING/SIDING: WIND LOADS</b>		LIMITING CRITERIA: 1.88 to 1 Safety Factor						20 to 1 Deflection Limit Ratio (L/D)								
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi						Flexural Modulus = 1000000 psi								
General Purpose		20 psf			30 psf			40 psf			50 psf			60 psf		
5 oz./sq. ft.		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Generic: 10GP		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit		3'-11"	3'-11"	4'-4"	3'-2"	3'-2"	3'-7"	2'-9"	2'-9"	3'-1"	2'-6"	2'-6"	2'-9"	2'-3"	2'-3"	2'-6"
Deflection Limit		2'-9"	3'-8"	3'-5"	2'-5"	3'-2"	2'-11"	2'-2"	2'-11"	2'-8"	2'-0"	2'-8"	2'-6"	1'-11"	2'-7"	2'-4"

010GP | 8oz. General Purpose

TABLES BELOW IN FEET AND INCHES ONLY

<b>ROOFING: POSITIVE LOADS</b>		LIMITING CRITERIA: 2.5 to 1 Safety Factor						45 to 1 Deflection Limit Ratio (L/D)								
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi						Flexural Modulus = 1000000 psi								
General Purpose		20 psf			30 psf			40 psf			50 psf			60 psf		
8 oz./sq. ft.		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Generic: 10GP		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit		4'-2"	4'-2"	4'-8"	3'-5"	3'-5"	3'-10"	3'-0"	3'-0"	3'-4"	2'-8"	2'-8"	3'-0"	2'-5"	2'-5"	2'-9"
Deflection Limit		2'-5"	3'-3"	3'-0"	2'-2"	2'-10"	2'-8"	1'-11"	2'-7"	2'-5"	1'-10"	2'-5"	2'-3"	1'-8"	2'-3"	2'-1"

<b>ROOFING/SIDING: WIND LOADS</b>		LIMITING CRITERIA: 1.88 to 1 Safety Factor						20 to 1 Deflection Limit Ratio (L/D)								
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi						Flexural Modulus = 1000000 psi								
General Purpose		20 psf			30 psf			40 psf			50 psf			60 psf		
8 oz./sq. ft.		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Generic: 10GP		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit		4'-10"	4'-10"	5'-5"	4'-0"	4'-0"	4'-5"	3'-5"	3'-5"	3'-10"	3'-1"	3'-1"	3'-5"	2'-10"	2'-10"	3'-2"
Deflection Limit		3'-2"	4'-4"	3'-11"	2'-10"	3'-9"	3'-5"	2'-7"	3'-5"	3'-2"	2'-4"	3'-2"	2'-11"	2'-3"	3'-0"	2'-9"

010DL | 5oz. Duralite

TABLES BELOW IN FEET AND INCHES ONLY

<b>ROOFING: POSITIVE LOADS</b>		LIMITING CRITERIA: 2.5 to 1 Safety Factor						45 to 1 Deflection Limit Ratio (L/D)								
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi						Flexural Modulus = 1000000 psi								
Duralite		20 psf			30 psf			40 psf			50 psf			60 psf		
5 oz./sq. ft.		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Generic: 10DL		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit		3'-5"	3'-5"	3'-10"	2'-9"	2'-9"	3'-1"	2'-5"	2'-5"	2'-8"	2'-2"	2'-2"	2'-5"	2'-0"	2'-0"	2'-2"
Deflection Limit		2'-1"	2'-10"	2'-7"	1'-10"	2'-5"	2'-3"	1'-8"	2'-3"	2'-1"	1'-7"	2'-1"	1'-11"	1'-5"	1'-11"	1'-10"

<b>ROOFING/SIDING: WIND LOADS</b>		LIMITING CRITERIA: 1.88 to 1 Safety Factor						20 to 1 Deflection Limit Ratio (L/D)								
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi						Flexural Modulus = 1000000 psi								
Duralite		20 psf			30 psf			40 psf			50 psf			60 psf		
5 oz./sq. ft.		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Generic: 10DL		1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN
Stress Limit		3'-11"	3'-11"	4'-5"	3'-3"	3'-3"	3'-7"	2'-9"	2'-9"	3'-1"	2'-6"	2'-6"	2'-9"	2'-3"	2'-3"	2'-6"
Deflection Limit		2'-9"	3'-8"	3'-5"	2'-5"	3'-3"	3'-0"	2'-2"	2'-11"	2'-8"	2'-0"	2'-9"	2'-6"	1'-11"	2'-7"	2'-4"

010DL | 8oz. Duralite

TABLES BELOW IN FEET AND INCHES ONLY

<b>ROOFING: POSITIVE LOADS</b>		LIMITING CRITERIA: 2.5 to 1 Safety Factor		45 to 1 Deflection Limit Ratio (L/D)												
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi		Flexural Modulus = 1000000 psi												
Duralite																
8 oz./sq. ft.																
Generic: 10DL	20 psf			30 psf			40 psf			50 psf			60 psf			
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	
Stress Limit		4'-3"	4'-3"	4'-9"	3'-5"	3'-5"	3'-10"	3'-0"	3'-0"	3'-4"	2'-8"	2'-8"	3'-0"	2'-5"	2'-5"	2'-9"
Deflection Limit		2'-5"	3'-3"	3'-0"	2'-2"	2'-10"	2'-8"	1'-11"	2'-7"	2'-5"	1'-10"	2'-5"	2'-3"	1'-8"	2'-3"	2'-1"

<b>ROOFING/SIDING: WIND LOADS</b>		LIMITING CRITERIA: 1.88 to 1 Safety Factor		20 to 1 Deflection Limit Ratio (L/D)												
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi		Flexural Modulus = 1000000 psi												
Duralite																
8 oz./sq. ft.																
Generic: 10DL	20 psf			30 psf			40 psf			50 psf			60 psf			
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	
Stress Limit		4'-10"	4'-10"	5'-5"	4'-0"	4'-0"	4'-5"	3'-5"	3'-5"	3'-10"	3'-1"	3'-1"	3'-5"	2'-10"	2'-10"	3'-2"
Deflection Limit		3'-3"	4'-4"	4'-0"	2'-10"	3'-9"	3'-6"	2'-7"	3'-5"	3'-2"	2'-4"	3'-2"	2'-11"	2'-3"	3'-0"	2'-9"

010CR | 4oz. Crystalite

TABLES BELOW IN FEET AND INCHES ONLY

<b>ROOFING: POSITIVE LOADS</b>		LIMITING CRITERIA: 2.5 to 1 Safety Factor		45 to 1 Deflection Limit Ratio (L/D)												
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi		Flexural Modulus = 1000000 psi												
Crystalite																
4 oz./sq. ft.																
Generic: 10CR	20 psf			30 psf			40 psf			50 psf			60 psf			
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	
Stress Limit		3'-1"	3'-1"	3'-5"	2'-6"	2'-6"	2'-10"	2'-2"	2'-2"	2'-5"	1'-11"	1'-11"	2'-2"	1'-9"	1'-9"	2'-0"
Deflection Limit		1'-11"	2'-7"	2'-5"	1'-8"	2'-3"	2'-1"	1'-7"	2'-1"	1'-11"	1'-5"	1'-11"	1'-9"	1'-4"	1'-10"	1'-8"

<b>ROOFING/SIDING: WIND LOADS</b>		LIMITING CRITERIA: 1.88 to 1 Safety Factor		20 to 1 Deflection Limit Ratio (L/D)												
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi		Flexural Modulus = 1000000 psi												
Crystalite																
4 oz./sq. ft.																
Generic: 10CR	20 psf			30 psf			40 psf			50 psf			60 psf			
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	
Stress Limit		3'-7"	3'-7"	4'-0"	2'-11"	2'-11"	3'-3"	2'-6"	2'-6"	2'-10"	2'-3"	2'-3"	2'-6"	2'-1"	2'-1"	2'-3"
Deflection Limit		2'-7"	3'-5"	3'-2"	2'-3"	3'-0"	2'-9"	2'-0"	2'-9"	2'-6"	1'-11"	2'-6"	2'-4"	1'-9"	2'-4"	2'-2"

010CR | 5oz. Crystalite

TABLES BELOW IN FEET AND INCHES ONLY

<b>ROOFING: POSITIVE LOADS</b>		LIMITING CRITERIA: 2.5 to 1 Safety Factor		45 to 1 Deflection Limit Ratio (L/D)												
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi		Flexural Modulus = 1000000 psi												
Crystalite																
5 oz./sq. ft.																
Generic: 10CR	20 psf			30 psf			40 psf			50 psf			60 psf			
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	
Stress Limit		3'-5"	3'-5"	3'-10"	2'-9"	2'-9"	3'-1"	2'-5"	2'-5"	2'-8"	2'-2"	2'-2"	2'-5"	2'-0"	2'-0"	2'-2"
Deflection Limit		2'-1"	2'-10"	2'-7"	1'-10"	2'-5"	2'-3"	1'-8"	2'-3"	2'-1"	1'-7"	2'-1"	1'-11"	1'-5"	1'-11"	1'-10"

<b>ROOFING/SIDING: WIND LOADS</b>		LIMITING CRITERIA: 1.88 to 1 Safety Factor		20 to 1 Deflection Limit Ratio (L/D)												
Panel Description: 2-1/2 x 1/2		Panel Strength = 15000 psi		Flexural Modulus = 1000000 psi												
Crystalite																
5 oz./sq. ft.																
Generic: 10CR	20 psf			30 psf			40 psf			50 psf			60 psf			
	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	1 SPAN	2 SPAN	3+ SPAN	
Stress Limit		3'-11"	3'-11"	4'-5"	3'-3"	3'-3"	3'-7"	2'-9"	2'-9"	3'-1"	2'-6"	2'-6"	2'-9"	2'-3"	2'-3"	2'-6"
Deflection Limit		2'-9"	3'-8"	3'-5"	2'-5"	3'-3"	3'-0"	2'-2"	2'-11"	2'-8"	2'-0"	2'-9"	2'-6"	1'-11"	2'-7"	2'-4"

We believe all information given is accurate, without guarantee. Since conditions of use are beyond our control, all risks are assumed by the user. Nothing herein shall be construed as a recommendation for uses which infringe on valid patents or as extending a license under valid patents. See our most current SDS at [crane.composites.com/sds.html](http://crane.composites.com/sds.html) prior to working with our products.

A global leading provider of resilient wall and ceiling coverings. Kemlite® was established in 1954 and the company changed names to Crane Composites in 2007. Crane Composites is headquartered in Channahon, IL and all our products are manufactured in the United States. We work with hundreds of distributors, ensuring our products are easily accessible and readily available to our customers.

The following are trademarks of Crane Composites, Inc. or a related company: SunStrong, Duralite, IsoTuff, Weatherglaze, Super 600, Crystalite, Glasbord, Kemlite, Surfaseal, Sequentia and Varietex

